

The following pages were  
extracted from the:

---

*COMPAQ SERVICE  
QUICK REFERENCE GUIDE*

# LTE 386s/20

COMPAQ LTE 386s/20 112500-01

## BOARD COMPATIBILITY LIST

Product	Assy No.	Spare Part No.	Page
---------	----------	----------------	------

### SYSTEM BOARDS

386SX-20 System	001651	121161-001	X
-----------------	--------	------------	---

### VIDEO BOARDS

Advanced Graphics 1024*	109958	114201-001	A-8
Advanced Graphics Memory*	109959	114202-001	X

\*Used in Desktop Expansion Base only

### MEMORY BOARDS

1 MB Mem Exp	121127-002	121251-001	X
4 MB Mem Exp	121127-004	121252-001	X

### MISCELLANEOUS INTERNAL

Pwr Cntrl Module	001586	121246-001	X
Backlight Inverter	121148	121237-001	X
2400-Baud Int Modem	001732	121250-001	X
2nd Serial	121173	121240-001	X
Display Module	121175	121418-001	X

### MISCELLANEOUS EXTERNAL

Product	Option Part No.	Spare Part No.
External Storage Module	117079-001	N/A
External Numeric Keypad	117092-001	117263-001
AC Charger/Adapter	121288-001	121236-001
Automobile Adapter	121120-001	121422-001
Fast Charger	121126-001	121421-001
Battery Pack	121121-001	121248-001
Desktop Expansion Base	124200-001	N/A
CD-ROM Adapter	124350-001	121467-001

### FIXED DISK DRIVES

Drive Size	Drive Type	Inter-leave	Inte-grated	Min ROM	Spare Part No.	Controller Assy No.
30 MB	60	1:1	Y	073090	121245-001	N/A
60 MB	61	1:1	Y	073090	121244-001	N/A

### TAPE DRIVES

Drive Size	Spare Part No.	Tape Cartridge	Spare Part No.
40/60 MB*	112524-001	40 MB (DC2000)	108142-001
		60 MB	122086-001
80/120 MB*	122087-001	80 MB	116966-001
		120 MB	116967-001

\*Used in External Storage Module only

# LTE 386s/20

## COMPAQ LTE 386s/20

### DISKETTE DRIVES

Size	Spare Part No.
1.44 MB	117120-001
1.2 MB	112566-001 (Used in External Storage Module only)
360 KB	112567-001 (Used in External Storage Module only)

### CABLE INFORMATION

Cable Function	Used With	Spare Part No.
Diskette Cable	Diskette Drive	121238-001
FDD LED Cable	Fixed Disk Drive	121420-001
Video Cable	Internal Display	121242-001

### JUMPER SETTINGS

#### External Storage Module

J1 Settings	Function
F (Disk)	Enables diskette drive
T (Tape)	Enables tape drive

### PROCESSOR/COPROCESSOR LOCATIONS

Processor (386SX-20)	Coprocessor (80387-20)
U17	U14

### SYSTEM ROM INFORMATION

#### System ROM Location


U19

#### System ROM Revision (Spare Part No. 121253-001)

Revision	PN on ROM
073090	123854-002

### CLOCK/BATTERY

Spare Part No. 117099-001

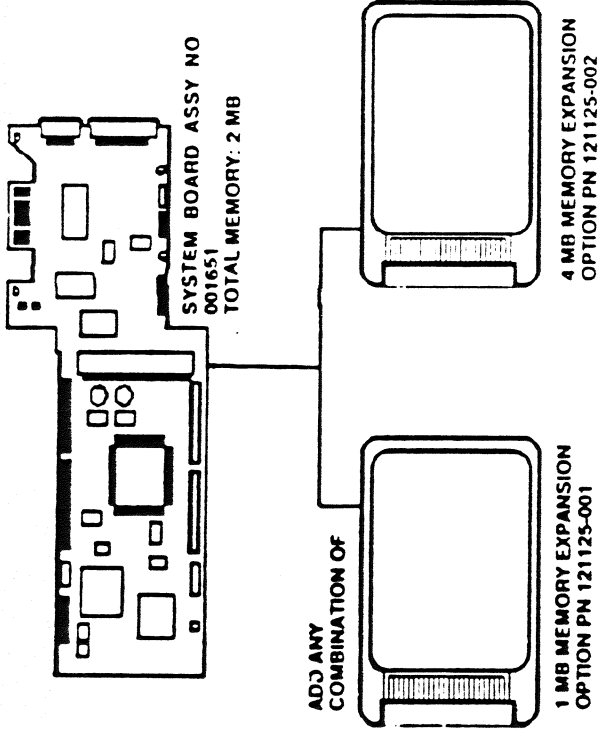

**MEMORY EXPANSION ALTERNATIVES**

COMPAQ LTE 386s/20 PERSONAL COMPUT			
SYSTEM MEMORY	MEMORY BOARDS ADDED TO SLOT 1	MEMORY BOARDS ADDED TO SLOT 2	TOTAL MEM
2 MB	1 MB		3 MB
2 MB	1 MB	1 MB	4 MB
2 MB	1 MB	4 MB	7 MB
2 MB	4 MB	1 MB	7 MB
2 MB	4 MB	4 MB	10 MB

**COMPAQ LTE 386s/20 MEMORY UPGRADE CHART**